
THE HIGH **PRESSURE HOMOGENIZERS**



- / CELL-DISRUPTION / DEAGGLOMERATION / DISPERSIONS
- / EMULSIONS / LIPOSOMES / PARTICLE SIZE REDUCTION
- / POLYMER MW REDUCTION / STABILIZATION / ...AND MORE



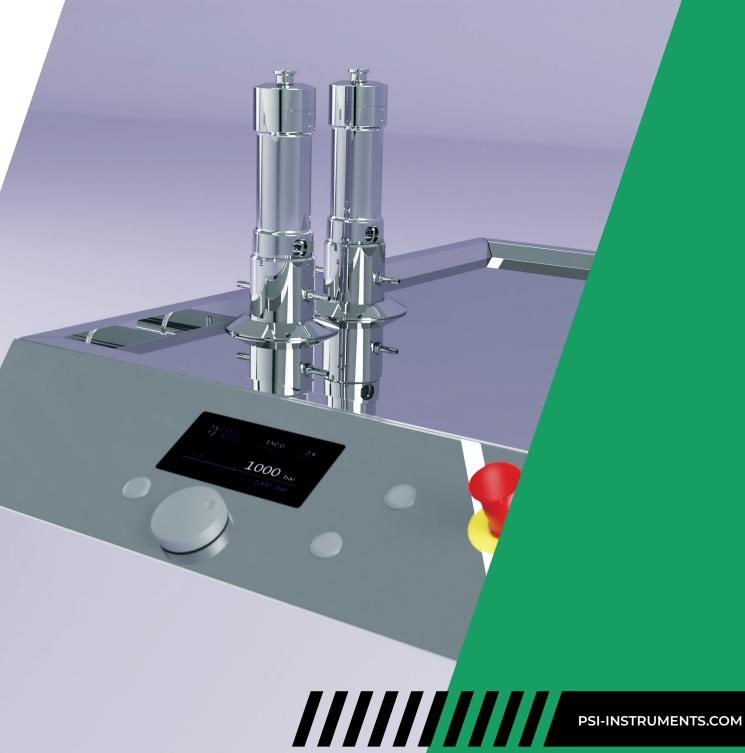

PSI-200

- / up to 2000 bar
- / up to 210 L/h @50Hz
- / less than 70dBA
- / small footprint

Combining high throughput with a compact footprint, the **PSI-200** is perfect for medium to large batches, even in continuous process configurations. Its quiet operation, sturdy construction and compact footprint make it easy to integrate in any production environment. It supports a wide range of options, from CIP/SIP to advanced sensors, to our modular skid systems for automated production.

FOOTPRINT

W×L×H 725×1140×930 mm

POWER

3×380V 50Hz, 3×400V 50Hz 3×220V 60Hz, 3×480V 60Hz

WEIGHT 330 kg

FLOWRATE 210 L/h

MAX PRESSURE

2000 bar

The choice of the best materials and finishing make the PSI-200 suitable for every industry, including the most demanding pharmaceutical, biochemical and food processing environments.

Every unit comes with a comprehensive standard equipment, including an electropolished shell-tube heat exchanger, an easy to use user interface and built-in data acquisition capabilities, but there are many accessories and options to make the PSI-200 the perfect fit for your needs, like GMP compliant record handling, remote control, NIST traceable temperature and pressure sensors.

CONTACT US

info@psi-instruments.com www.psi-instruments.com

